



Atik Flooring Solutions

ATIK LVT VINYL SHEET



Atik LVT vinyl sheet is a high-quality choice for a range of commercial and residential applications, especially heavy traffic areas.

Ideal for developers, housing associations and local authorities, high performance LVT vinyl sheet is easy to install, slip resistant and comes with a 10-year warranty.

WHY CHOOSE **ATIK LVT VINYL SHEET**

Our heterogeneous LVT vinyl sheet range features contemporary colours and the timeless textures of wood. The grooves give a realistic and luxurious wood effect with the ease and benefits that vinyl bring. The flooring features a high quality backing and is slip resistant, durable, strong and perfect for busy spaces in any environment.

- Slip resistant
- Wide range of designs
- Perfect for everyday use
- Easy to install
- High quality backing
- Clean and hygienic



COLOUR RANGE


The colours are representative of the range,
please get in touch for samples.




KENT OAK



LONDON OAK

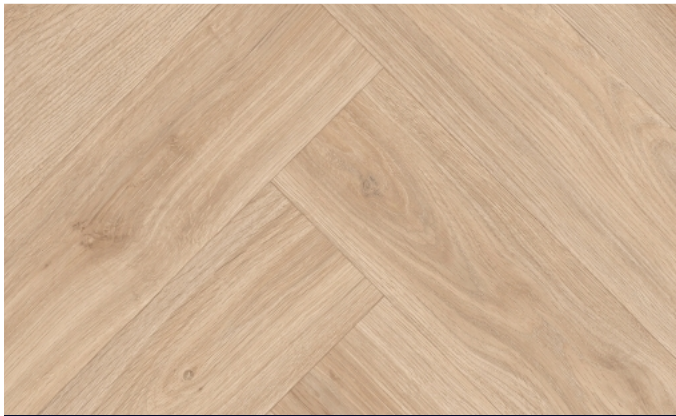


DORSET OAK

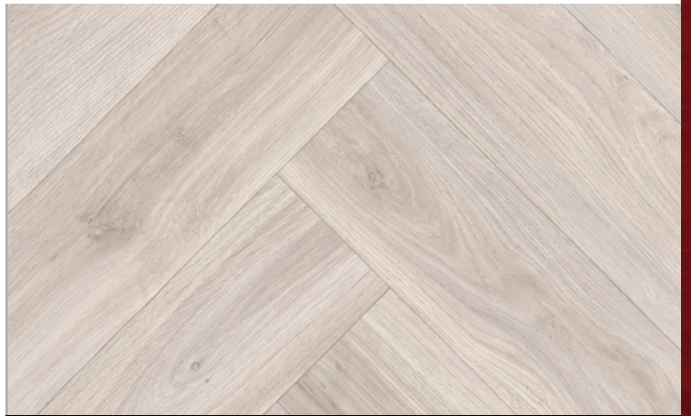

SUFFOLK OAK



OXFORD OAK

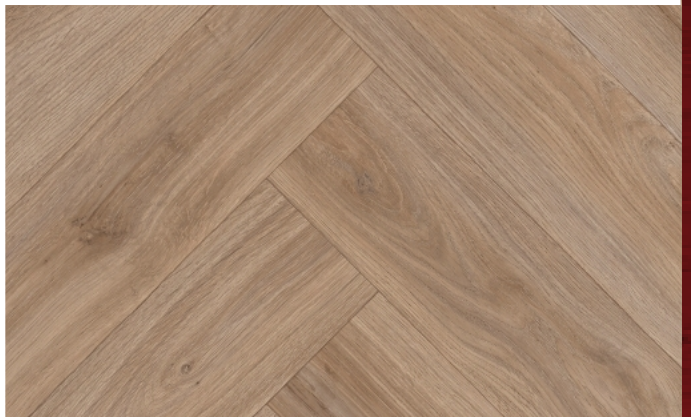

COTSWOLD OAK

Atik LVT Vinyl Sheet

Technical Specification

Flooring Type		Compact Flooring
Heterogeneous PVC	ISO 10582	
Type of installation		Glued
Level of use	EN ISO 10874	23-33
Total thickness	EN ISO 24346	2,00 mm
Wear layer	EN ISO 24340	0,50 mm
Wear layer PUR treatment		Hyperguard+
Total weight/m ²	EN ISO 23997	ca. 2.150 g
Width	EN ISO 24341	2.4 m
Standard Length	EN ISO 24341	ca. 25 m
Weight of standard roll		ca. 108-216 kg
Inflammability	EN 13501-1	Bfl-S1*
Slip resistance	EN 13893	DS
Slip restraint	EN 16165 Annex B	R10
Residual indentation	EN ISO 24343-1	norm ≤ 0.10mm
Furniture leg resistance	EN ISO 16581	PASS
Curling	EN ISO 23999	≤ 8mm
Electrical resistance	EN 1081	3.99 x 10 ⁸ Ohm
Static electrical propensity	EN I815	≤ 2kV (antistatic)
Dimensional stability	EN ISO 23999	norm ≤ 0.40%
Thermal conductivity	ISO 8302 (1991)	0.130 W/(m.K)
Heat insulation	EN 12667: 2001-01	0.0153 (m ² .K/W)
Binder quantity in wear layer	EN 10582	Type I
Abrasion group	EN 660-2	Class T
Indoor air quality		LOW VOC
Acoustic insulation	EN ISO 717-2	ΔLw 8 dB
Castor chair resistance	EN ISO 4918	Pass
Castor type	EN 12529	Type W
Light fastness	ISO 105B02	≥ 6
Underfloor heating	EN 12524/EN 12667	Suitable ≤ 27°C
Resistance to chemicals	EN ISO 26987	Very good
Hot welding		Available
Cold welding	Invisiweld	Suitable
Warranty years		12

*Tested on concrete subfloor (Cfl-S1 on wood).

The warranty covers manufacturing defects and premature wear in the event of normal use. The products do not contain any substances from the current candidate list published by ECHA (substances of very high concern) to be published under the REACH regulation. Exclude any rubber parts that may come into direct contact with the flooring (chair ends, furniture, wheels). Use only PVC or polyethylene components. IVC reserves the right to change or amend any written information without notice. Ensure the latest information is being consulted by referring to the website.





Atik Flooring Solutions

Atik Flooring Solutions are nationwide suppliers of high-quality, high performance flooring solutions in the UK. With over 20 years' experience, Atik not only supply flooring but offer in depth support and consultancy to clients to ensure the right product specification for their application.

Get in touch to find out more about our specialist and innovative flooring solutions.

033 0088 1243

sales@atikflooringsolutions.co.uk

www.atikflooringsolutions.co.uk