



Atik Flooring Solutions

# ATIK LVT 30 **FLOORING**



Luxury Vinyl Tiles (LVT) floors are a popular choice in homes because of the numerous benefits of comfort, softness and warmth, while using a seven-layer construction that delivers exceptional performance in every room.

Ideal for developers, housing associations and local authorities, all looking to ensure a high-performance flooring finish.

# WHY CHOOSE **ATIK LVT 30 FLOORING**

Atik LVT 30 is an innovative flooring solution with a compact multi-layer construction that delivers high performance. Scratch-resistant, stainproof and with excellent dimensional stability, this is a floor that will withstand day-to-day life.

- Easy to install using only adhesive
- Scratch resistance and fights off staining
- Multiple layers allows for use in any room
- Will withstand constant everyday use
- Authentic and original natural designs
- Recycled content and low impact manufacturing



# COLOUR RANGE

This is a representative selection of a much wider range of colours and styles.



**NATURAL OAK**




**HONEY OAK**



**SMOKED OAK**



**DRIFTWOOD**

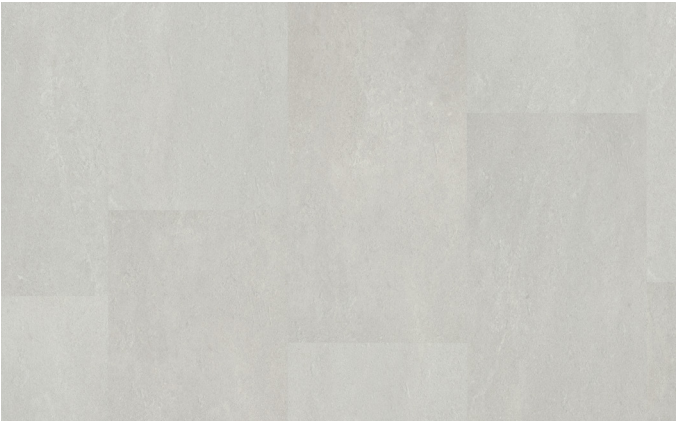

**GRAPHITE**



**CHARCOAL**

# Atik LVT 30 Flooring

## Technical Specification

PRODUCT SPECIFICATIONS		
Product standard	EN ISO 10582	Heterogeneous resilient floorcovering
Total thickness	EN ISO 24346	2,0 mm
Wear layer	EN ISO 24340	0,30 mm
Classification	EN ISO 10874	Domestic: 23 / Commercial: 31
Total weight g/m <sup>2</sup>	EN ISO 23997	3.605 - 3.600 (HB)
Wear layer binder content	EN ISO 10582	Type 1
Abrasion group	EN 660-2	Group T: ≤ 2,00 mm <sup>3</sup>
Dimensions	EN ISO 24342	185 x 1219,2 mm 21 planks/box = 4,74m <sup>2</sup> 60 boxes/pallet = 284,4m <sup>2</sup>  Tiles: 457,2 x 914,4 mm 12 tiles/box = 5,02m <sup>2</sup> 58 boxes/pallet = 291,16m <sup>2</sup>
Surface treatment		PUR Ecoprotec™
Locking system		Dry back
Bevelled edges		Yes (Micro bevel)

PRODUCT PERFORMANCES		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Castor chair	ISO 4918	No damage (Type W)
Furniture leg	EN ISO 16581	No damage
Squareness & straightness	EN ISO 24342	≤ 0,25 mm
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Impact sound reduction	EN ISO 717-2	L <sub>w</sub> = 6 dB
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	DIN 51130 EN 13893	R10 DS
Resistance to chemicals	EN ISO 26987	Not affected (0)
Thermal resistance	EN ISO 10456	0,02 m <sup>2</sup> K/W
Curl after exposure to heat	EN ISO 23999	≤ 2 mm
Fire resistance	EN 13501-1	Bfl-s1
Electrical properties	EN 1815	≤ 2kV
Resistance against staining	EN 26987	Passed
Underfloor heating suitability	EN 12524	Suitable - max. 27°C

# Atik LVT 30 Flooring

## Technical Specification

### ENVIRONMENT

TVOC after 28 days (AgBB test) - Indoor air quality	ISO 16000-9	≤ 100µg/m <sup>3</sup>
VOC emission class (French regulation) - Indoor air quality	ISO 16000-9	A+
Floorscore VOC test - Indoor air quality	ISO 16000-9	Passed
Plasticizer		Phthalate-free
Formaldehyde group	EN 717-1	E1
Recyclability		100%

### WARRANTIES

Residential warranty		25 years
Commercial warranty		5 years

### CE MARKING

DoP number		No. 001-520
------------	--	-------------

The warranty covers manufacturing defects and premature wear in the event of normal use



Superguard®

Scuff & stain resistant

Suitable for bathrooms





## **Atik Flooring Solutions**

**Atik Flooring Solutions are nationwide suppliers of high-quality, high performance flooring solutions in the UK. With over 20 years' experience, Atik not only supply flooring but offer in depth support and consultancy to clients to ensure the right product specification for their application.**

Get in touch to find out more about our specialist and innovative flooring solutions.

**033 0088 1243**

**[sales@atikflooringsolutions.co.uk](mailto:sales@atikflooringsolutions.co.uk)**

**[www.atikflooringsolutions.co.uk](http://www.atikflooringsolutions.co.uk)**