Atik Flooring Solutions


ATIK
EASI-FIT VINYL SHEET R10



Atik Easi-fit Vinyl Sheet R10 is a range of high-quality robust and stylish flooring perfect for residential applications.

Ideal for developers, housing associations and local authorities, Easi-fit Vinyl Sheet R10 features a unique felt backing, is easy to install, slip resistant and comes with a 10-year warranty.

WHY CHOOSE **ATIK EASI-FIT VINYL SHEET R10**

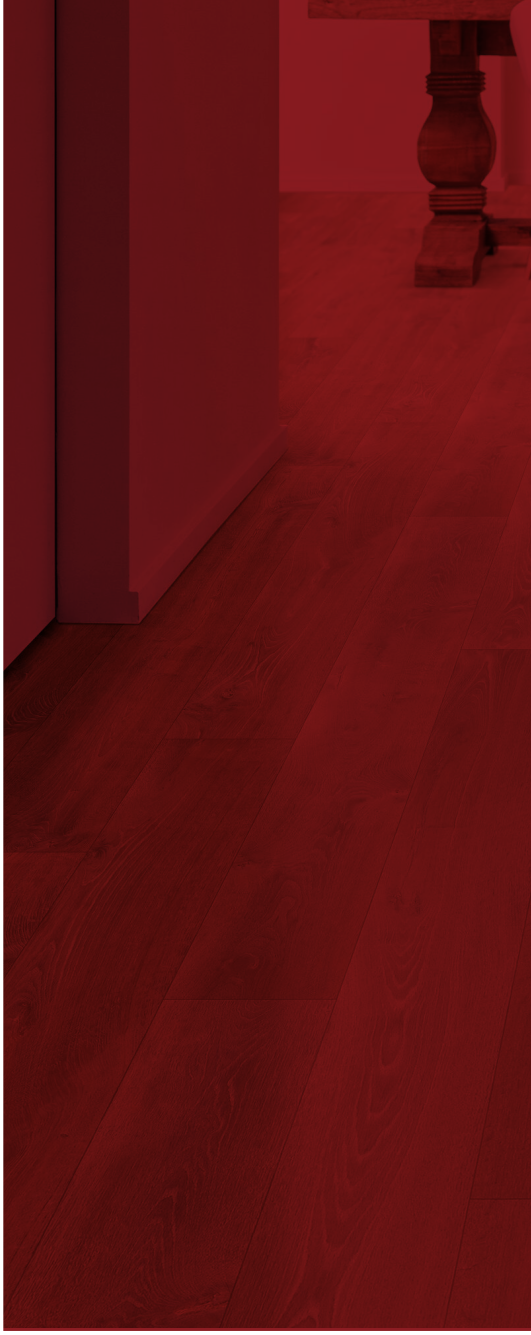


Our Easi-Fit Vinyl Sheet R10 range comes in a number of on-trend colours and styles to suit all types of rooms and homes. Offering slip resistance and impact sound reduction, this cushioned-feel vinyl range is perfect for high traffic areas in any environment, offering health and well-being benefits to occupants.

The surface is waterproof and easy to clean and maintain plus installation is also simple and straightforward and will ensure durability with comfort.

- R10 slip resistance
- 15db impact sound reduction
- Unique felt backing
- 10 year warranty
- Stain resistant
- Easy clean surface
- Multi-width rolls available




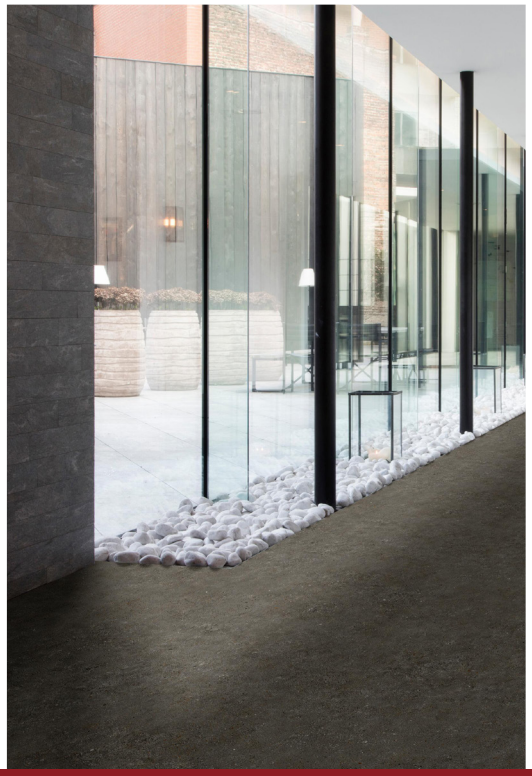




COLOUR **RANGE**


The colours are representative of the range, please get in touch for samples.

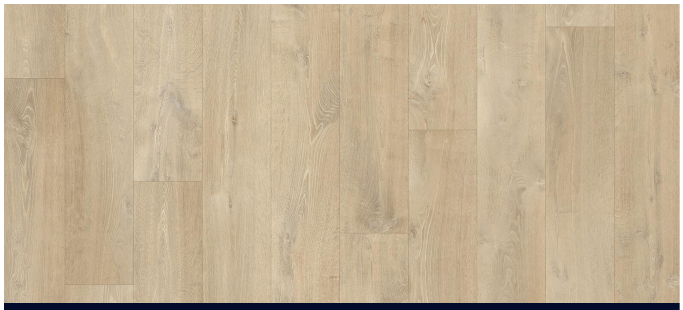


PALE OAK

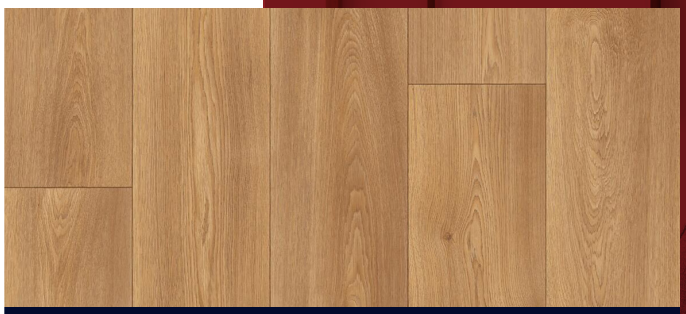


GOLDEN OAK

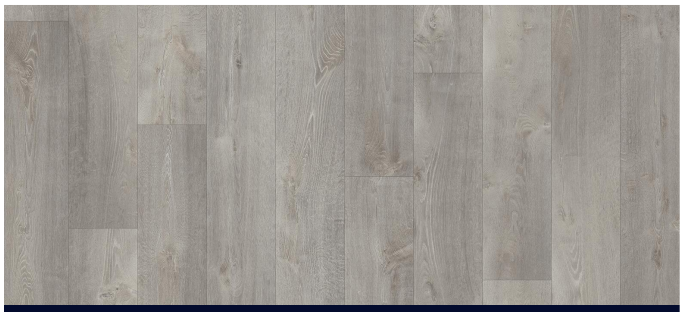


DOVE OAK

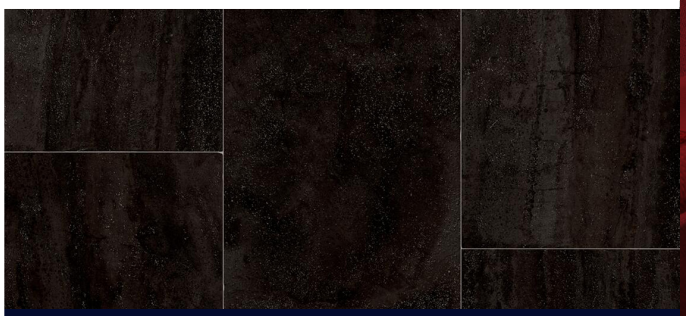


JT STONE

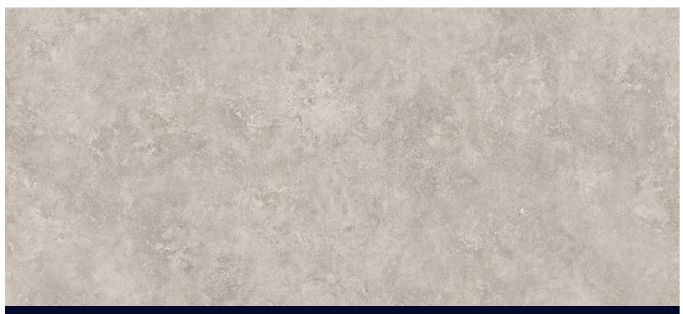

SILVER GREY

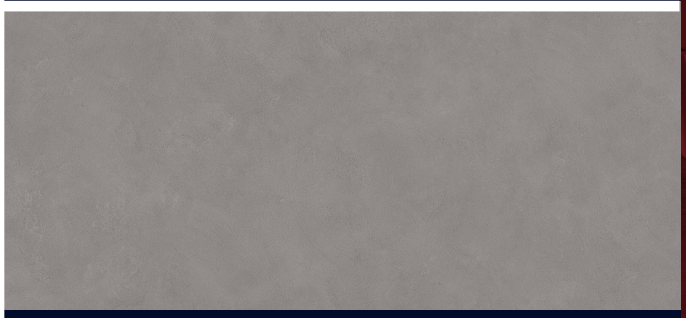

TITANIUM

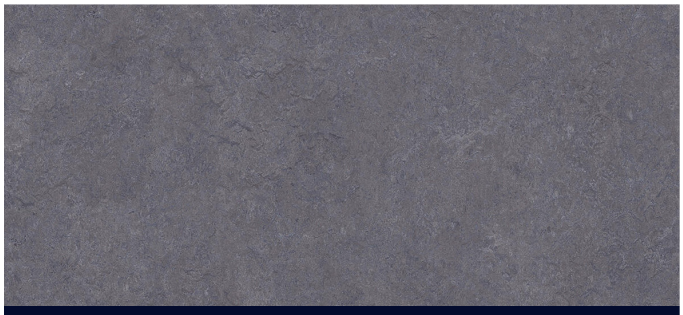

LB GREY



FLINT

Atik Easi-Fit Vinyl Sheet R10

Product Information

Norm	EN ISO 26986	
Usage classification	ISO 10874 (EN 685)	23 Domestic heavy 32 Commerical general 41 Industrial moderate
Total thickness	EN ISO 24346 (EN 428)	2,80 mm
Wear layer	EN ISO 24340 (EN 429)	0,40 mm
Weight	EN ISO 23997 (EN 430)	1950 g/m2
Available roll widths	EN ISO 24341 (EN 426)	2 - 3 - 4 m*
Standard roll length	EN ISO 24341 (EN 426)	+/- 30 m

Technical Information

Abrasion group	EN 660-2	T
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0,40 %
Curling	EN ISO 23999	≤ 8 mm
Light stability	EN ISO 105 B02	≥ 6
Residual indentation	EN ISO 24343-1 (EN 433)	≤ 0,20 mm
Impact sound improvement	EN ISO 717/2	Lw 15 dB
Dynamic coefficient of friction	EN 13893	> 0,60
Slip resistance (ramp test with oil)	EN 16165:2021 – Annex B (DIN 51130)	R10
Reaction to fire	EN 13501-1	Bfl-s1
Underfloor heating	EN 12667	Suitable
Thermal resistance	ISO 8302	0,0180 m2.K/W
Thermal conductivity	ISO 10456 (EN 12524)	0,156 W/(m.K)
Chemical resistance	ISO 26987 (EN 423)	Resistant
Static electrical propensity	EN 1815	< 2 kV
Delamination test (peel resistance)	EN ISO 24345	≥50N/50mm
Furniture leg resistance	ISO 16581 (EN 424)	No damage
Castor chair resistance	EN ISO 4918	Suitable
Pendulum test	CENTS 15676:2007	45+
Top coating		Premium coating
TVOC after 28 days	ISO 16000 (EN 16516)	<1000 µg/m³
Cold welding	Werner Müller	Type A

* check availablity per individual reference

Atik Flooring Solutions

Atik Flooring Solutions are nationwide suppliers of high-quality, high performance flooring solutions in the UK. With over 20 years' experience, Atik not only supply flooring but offer in depth support and consultancy to clients to ensure the right product specification for their application.

Get in touch to find out more about our specialist and innovative flooring solutions.

033 0088 1243
sales@atikflooringsolutions.co.uk
www.atikflooringsolutions.co.uk